

**DIG ALERT**  
 BEFORE EXCAVATING  
 CALL; U.G. SERVICE ALERT  
 1-800-227-2600  
 CALL 2 FULL WORKING DAYS IN ADVANCE

- CONSTRUCTION NOTES:**
1. MINIMUM COVER FOR STRUCTURE IS 30" BELOW GUTTER FLOW LINE OR 36" BELOW EXISTING GRADE, WHICHEVER IS GREATER.
  2. ALL SUBSTRUCTURE INFORMATION SHOWN WAS TAKEN FROM RECORDS AVAILABLE AND IS APPROXIMATE. VERIFY, LOCATE AND PROTECT AS REQUIRED.
  3. ALL TRAFFIC CONTROL TO BE IN ACCORDANCE WITH THE 2006 WORK AREA TRAFFIC CONTROL HANDBOOK AND CALIFORNIA M.U.T.C.D.

**EXCAVATION DATA:**

OWNER	ASPHALT	CONCRETE	DIRT
RANCHO DOMINGUEZ	NA	NA	2'x3' = 6 SQ FT

- CONSTRUCTION NOTES:**
1. EXCAVATE & PLACE (1) 1" SIDEWALK ANCHOR IN DIRT SIDEWALK
  2. EXCAVATE & PLACE (2) 3-ELECTORDE GROUND BED IN DIRT SIDE WALK
  3. SAW CUT AND REPLACE DIRT SIDEWALK SCORE-LINE TO SCORE-LINE


**PL 3-ELECTRODE  
GROUND BED**

**PL 1" ANC  
LEAD = 25'**

**P # 2034629E  
50' CLS 4**



A104 A004SQ4  
 TGM: 765, C2  
 LANCE LOPEZ  
 ANCHOR & GROUND BED PLACEMENT SKETCH

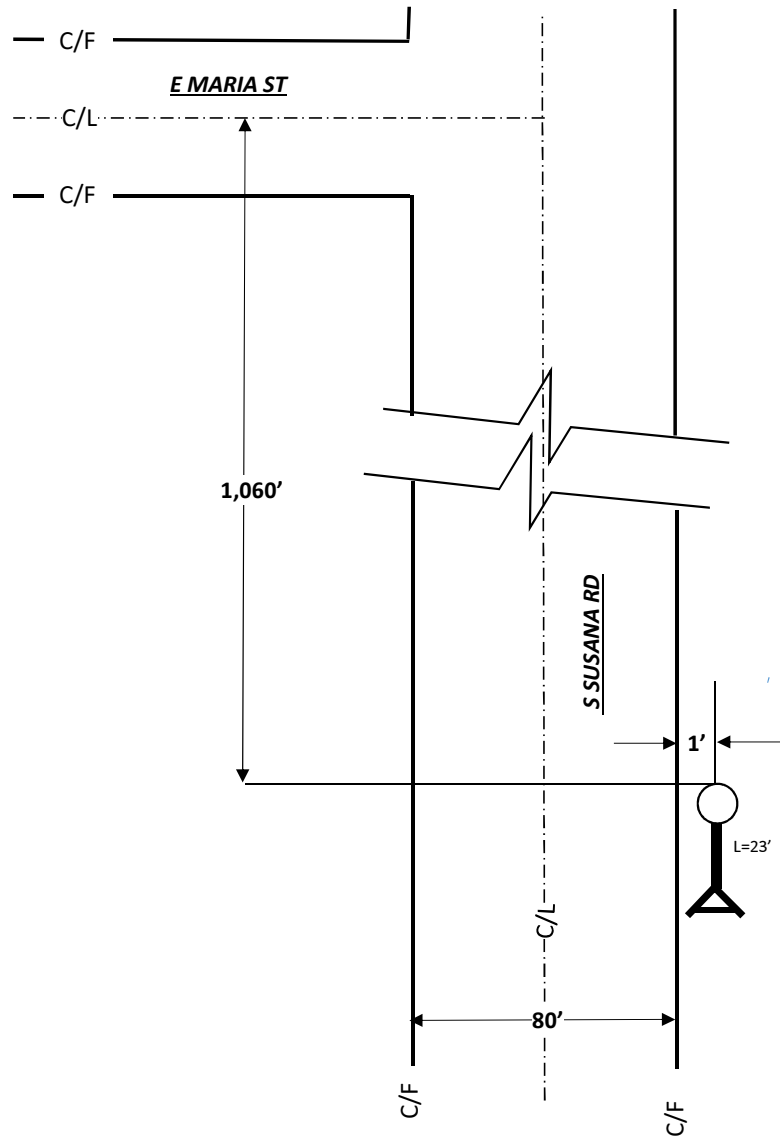

**DIG ALERT**  
 BEFORE EXCAVATING  
 CALL; U.G. SERVICE ALERT  
 1-800-227-2600  
 CALL 2 FULL WORKING DAYS IN ADVANCE

- CONSTRUCTION NOTES:**
1. MINIMUM COVER FOR STRUCTURE IS 30" BELOW GUTTER FLOW LINE OR 36" BELOW EXISTING GRADE, WHICHEVER IS GREATER.
  2. ALL SUBSTRUCTURE INFORMATION SHOWN WAS TAKEN FROM RECORDS AVAILABLE AND IS APPROXIMATE. VERIFY, LOCATE AND PROTECT AS REQUIRED.
  3. ALL TRAFFIC CONTROL TO BE IN ACCORDANCE WITH THE 2006 WORK AREA TRAFFIC CONTROL HANDBOOK AND CALIFORNIA M.U.T.C.D.

**EXCAVATION DATA:**

OWNER	ASPHALT	CONCRETE	DIRT
RANCHO DOMINGUEZ	NA	NA	2"x3' = 6 SQ.FT

- CONSTRUCTION NOTES:**
1. EXCAVATE & PLACE (1) 1" SIDEWALK ANCHOR IN DIRT SIDEWALK
  2. SAW CUT AND REPLACE DIRT SIDEWALK SCORE-LINE TO SCORE-LINE



A104 A004SQ4  
 TGM: 765, C2  
 LANCE LOPEZ  
 ANCHOR PLACEMENT SKETCH